





# LINK-PIPE®

Manufacturer of No-Dig Pipe Repair Products

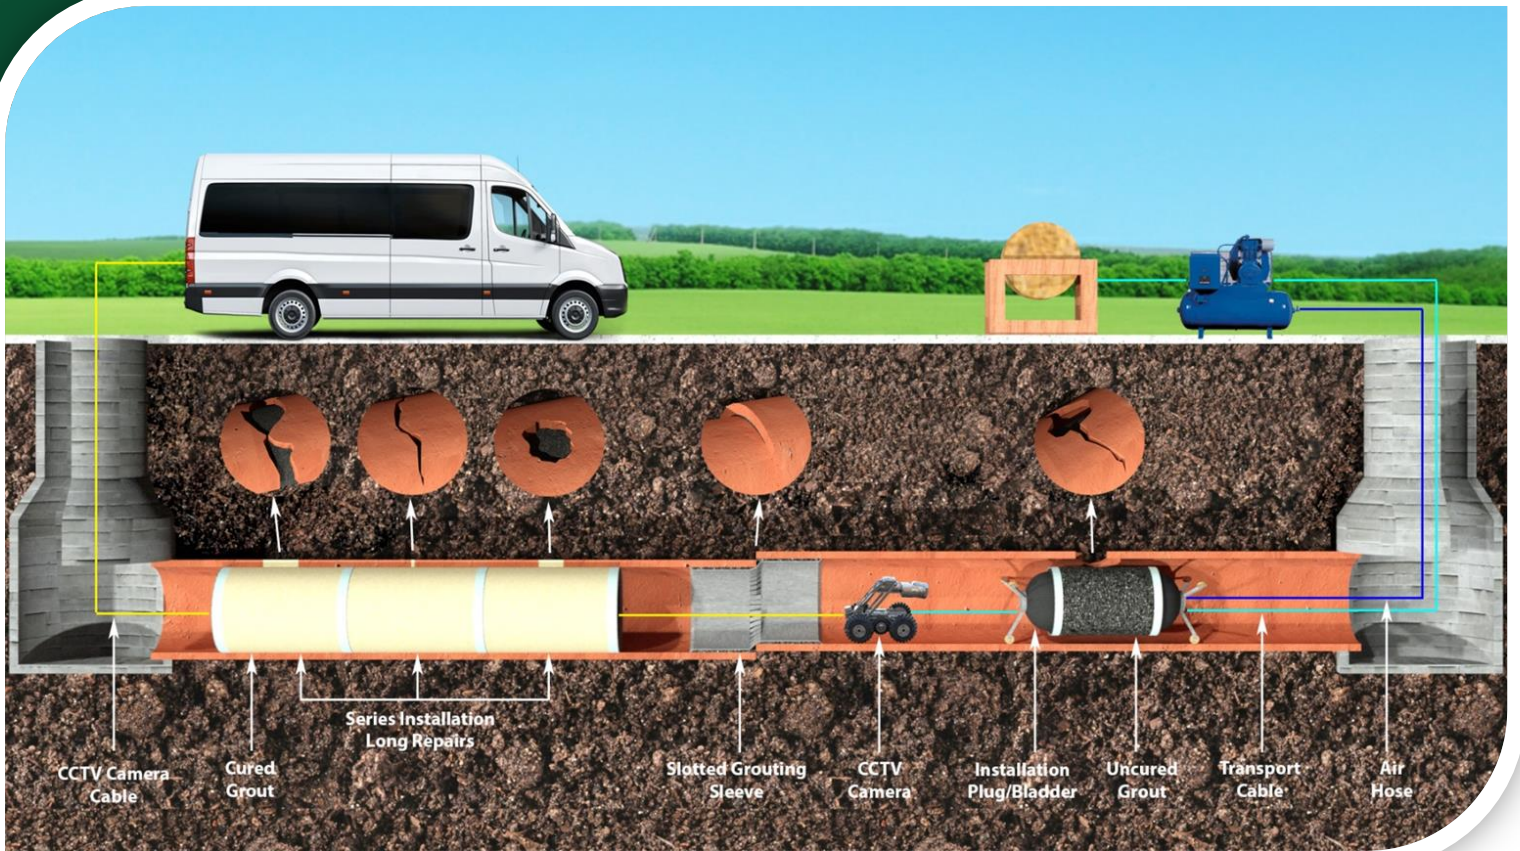

## Slotted Grouting Sleeve™




### Standard Dimensions:

Host Pipe Inside Diameter (inches):  
6 – 48  
Laying Length (inches):  
24 and 36

## Related Application



Before

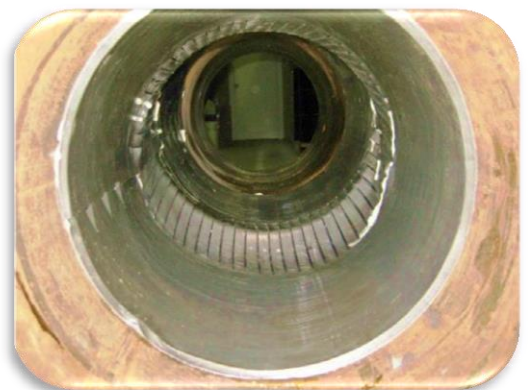



After

Slotted Grouting Sleeve™ is designed primarily to repair offsets. It has stainless steel core strips to allow the shaping of the sleeve by assuming the abnormal shape of the pipes and conduits.

**Link-Pipe Inc.**  
**1-800-265-5696**

**www.linkpipe.com | info@linkpipe.com**

LINK-PIPE and  are registered trademarks of Link-Pipe Inc. in Canada. LINK-PIPE is a registered trademark and  is a trademark of Link-Pipe Inc. in the United States. Dia-Meter™, Gas Sealer™, Hydro-Seal™, Insta-Liner™, Grouting Sleeve™, Link-Pipe PVC™, Pressure-Seal™, Sewer Sealer™ and Sewer Sealer VD™ are trademarks of Link-Pipe Inc. Grouting Sleeve™ is protected by US Patent No. 5,351,720, Canadian Patent No. 2,131,291, Hong Kong Patent No. HK1003143. Gas Sealer™ is protected by US Patent No. 6,138,718. Jacketed Sealer™ is protected by US Patent No. 9,052,051, Russian Patent No. 2533604, Chinese Patent No. ZL201010153141.9, Hong Kong Patent No. HK1149066.